





وظيفة التنظيف الذاتي
SELF-CLEANING
FUNCTION




مروحة متعددة السرعات
WIDE-ANGLE LOUVERS



التحكم باتجاه دفع الهواء
AIR FLOW DIRECTION
CONTROL

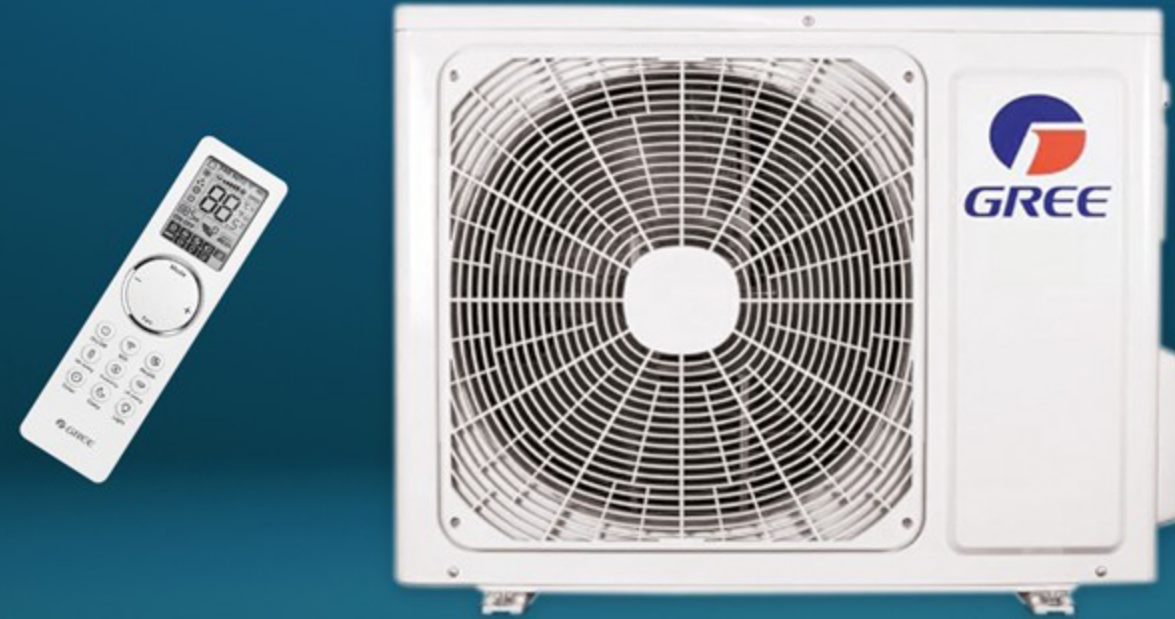

سعة التبريد
Cooling capacity
30000
و ح ب/س ... BTU / H

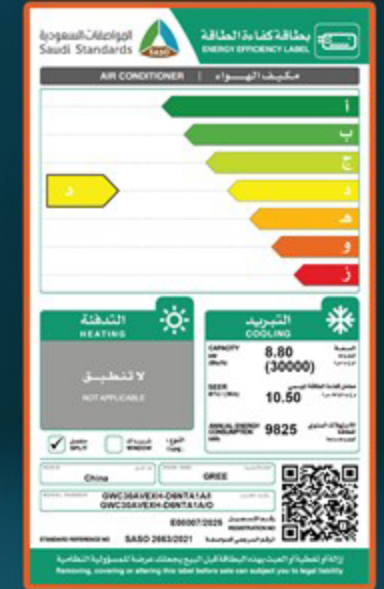

MODEL NO.		AIMAX	GWC24AVEXF-D6NTA1A	GWH24AVEXF-D6NTA1A	GWC30AVEXH-D6NTA1A	GWH30AVEXH-D6NTA1A
Cooling Capacity (T1)		BTU/h	23200	23200	30000	30000
		KW	6.81	6.81	8.8	8.8
Cooling Capacity (T3)		BTU/h	21300	21700	26000	26000
		KW	6.24	6.36	7.6	7.6
Heating Capacity (T1)		BTU/h	-	21500	-	29200
Electric Data	Cooling Power Input(T1)	W	1871	1871	2422	2422
	Cooling Current(T1)	A	8.2	8.2	11.0	11.0
	Cooling Power Input(T3)	W	2302	2347	2960	2960
	Cooling Current(T3)	A	10.1	10.1	13.0	13.0
	Heating Power Input	W	-	1680	-	2342
	Heating Current	A	-	7.2	-	10.5
INDOOR	Air Flow Volume (L - H)	CFM	765 - 647	765 - 647	765 - 618	765 - 618
	Dimension (W*H*D)	mm	1110×347×257		1110×347×257	
	Net Weight	Kg	17	17	18	18
	Noise level (L-H)	dB (A)	40-46	40-46	41-46	41-46
SEER		BTU/(w.h)	10.7	10.75	10.5	10.5
Power supply source		V/Ph/Hz	220V-230V/1Ph/60Hz			
OUTDOOR	Dimension (W*H*D)	mm	958×660×402		1000×746×427	
	Net Weight	Kg	45	48.5	57.5	58.5
	Refrigerant	Type	R32			
	Compressor	Type	ROTARY			
Refrigerant pipe	Liquid pipe	Inch	Φ 1/4	Φ1/4	Φ1/4	Φ1/4
	Gas pipe	Inch	Φ 5/8	Φ5/8	Φ5/8	Φ5/8
	Max. Length	m	40	40	40	40
	Max. Height	m	25	25	25	25

